

CONDUCTING FORM

THE USE OF GESTURAL HAND MOVEMENT AS A PART OF THE DIGITAL DESIGN TOOL-SET.

BY TAVS JØRGENSEN
AUTONOMATIC (3D DIGITAL PRODUCTION RESEARCH CLUSTER)
THE DESIGN CENTRE
UNIVERSITY COLLEGE FALMOUTH
TREMOUGH, PENRYN
CORNWALL, TR10 9EZ
UK
TEL: +44(0) 1326 253689
TAVS.JORGENSEN@FALMOUTH.AC.UK

This paper describes a practice based research project undertaken with the support of the Automatic Digital Research Cluster at University College Falmouth.

The project is located in the broad context of developing human oriented interfaces with 3D digital design tools. Within this wide context it is specifically concerned with creating design objects that are derived from digitally recording human gesture and carry the individual character of those gestures into the finished artefact. This interest in the 'evidence of the human hand' in an artefact and a desire for a more direct and intuited interaction with technology can be identified as a pre-occupation of crafts practitioners in particular and this research contributes to the area of digital craft practices. It is also significant to the wider field of design in establishing methods of production of forms that it would be difficult to derive from the standard CAD toolset operated through keyboard and mouse interaction.

The research centres on the investigation of two different types of equipment. The

Microscribe® G2L – a digitizing arm, and the ShapeHandPlus™ motion capture data glove.

The findings of both investigations are compared and reviewed by the author.

The paper describes a range of production techniques for designing and making objects in a variety of materials, pieces which are critically reviewed by the researcher in relation to: the feasibility of the design and development method and the evidence of gesture in the aesthetics of the final forms.

INTRODUCTION

When Malcolm McCullough in 1996 published his seminal book, 'Abstracting Craft' on the development of information technology as a creative medium, his opening chapter was titled: 'Hands' - here he makes the case that the human hand is vastly under utilized in the emerging digital toolset.

This research's objective is to investigate the creative possibilities of integrating the intuitive use of hands with digital tools and through this to develop feasible applications for design production.

The research evaluates the extent to which the gesture of the 'human hand' is evidenced in the finished pieces. In the context of craft production the variations and 'imperfections' that result from individual human

interaction with materials and technology are valued as a humanising element of the object (Greenhalgh 2002). This research seeks to explore the possibilities of using new technology as a conduit to capture the free flowing forms generated from gestural hand movement to create physical products which carry the evidence of the a creation process involving the human hand. In response to these aims and objectives, this project investigates the use of two low cost systems: The Microscribe® G2L - a digitizing scribe normally used for reverse engineering (Immersion 2007) and the ShapeHandPlus™ motion capture equipment (Measurand 2007). Both systems were investigated for the use of describing shape and form freely in space, movements which were recorded as linear paths or a series of coordinated points. The recorded data was utilized for a range of design processes some of which were developed specifically for this project.

Drawing on the successful outcomes of this project, the paper concludes by reviewing the results, the future potential of the concept and suggesting possibilities for extending the research.

INVESTIGATIONS WITH THE SHAPEHANDPLUS™ MOTION CAPTURE SYSTEM.

THE CONCEPT OF MOTION CAPTURE (MOCAP) AND THE TECHNOLOGY USED IN THE SHAPEHANDPLUS™ SYSTEM.

The best definition of what is commonly know as Motion Capture (Mocap) is still the one supplied by Scott Dyer, Jeff Martin, and John Zulauf, in a comprehensive white paper on the subject in 1995: [Motion Capture] "involves measuring an object's position and orientation in physical space, then recording that information in a computer-usable form. Objects of interest include human and non-human bodies, facial expressions, camera or light positions, and other elements in a scene."

The concept was originally developed for the military and human medical research. During the 1980 and 1990 the technology started to be employed in the animation and film industry (Furness. 2004). Even though Mocap is today used in a wide range of applications, there has been little research into the use of the technology as a creative tool or conduit to use human movement to create physical 3D shapes.

There are many different methods of digital Mocap. The most commons ones are optical systems which rely

on the use of a number of cameras to record the motion by locating the spatial coordinates by 'overlapping' the recordings and thereby triangulating the positions. These systems often involve the use of 'markers' which are placed on the user. The markers can take the form of active markers such as LEDs or passive markers such as small reflective spheres which rely on a pulsating projected light source to record their location in space. The family of Mocap systems via the concept of markers also includes systems relying on magnetic position location (Furness 2004).

All of these systems have their own strengths and weaknesses, but despite many years of research Mocap remains a complicated affair, with none of the optical methods as problem free solutions. The problems include several issues, such as 'occlusion' (Furness 2004), which is the optical obstruction by the body or limbs of the wearer. The continual identification of which marker is which, is also a potential problem area. Another major issue is that of cost, both in terms of acquiring the systems but equally the man-hours it takes to operate them (Liverman 2004).

In addition to the marker technology there are 'mechanical' Mocap systems which require the user to wear physical recording devices for each joint, these are the so-called exoskeleton systems such as the Gypsy Mocap system (Metamotion 2007).

The equipment investigated in this research relies on a principle related to the exoskeleton, however instead of a mechanically moving recoding device this system, developed by the Canadian company Measurand, relies on fibre optics tapes to record the movement of the human joints (Measurand 2007). The underlying principle of the system is that the bending and twisting of the fibre optic tapes can be recoded or relayed via computer graphics in real-time. When applied to a body the level of twist and bends of the tapes can be related to human kinematics through a series of algorithms. Some of the advantages of these fibre optic based systems are the low cost, relative robustness and the real time recording feedback.

The Shapehand and Shapehandplus is part of a range of various products based on this principle, which Measurand have supplied for a number of years. The Shapehand records only the movement of the hand and individual digits, where ShapeHandPlus also records the movement of the arm, the hand and the fingers from the shoulder joint down. Both systems can be use as a part of a full Mocap body outfit, in pairs, or as individual pieces of equipment recording just the movement of the

fingers, hand or arm respectively.

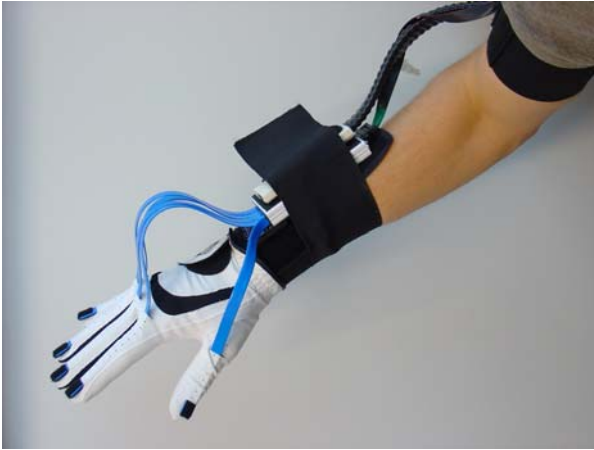


Figure 1. The ShapeHandPlus™ data glove

USING THE SHAPEHANDPLUS™ SYSTEM.

The fibre optic tapes of the ShapeHandPlus system attach loosely to the body of the wearer by Velcro straps. The system in its basic form connects with Measurand's own recording software (ShapeRecorder) via cables to the host computer's serial or USB port, (a wireless option is also available).

The tapes are calibrated with predetermined arm and hand positions based on the cardinal body poses. There is a comprehensive range of hand and arm positions supplied through the bundled software, but individual customised poses can also be made up within the software to fit the individual users needs (Measurand 2007).

The data from the equipment is relayed 'real-time' as a graphical representation on screen via the supplied software.

The focus of this research is to establish the potential use of this equipment as a design tool, therefore the ease of use and the potential for a user to operate the systems single-handed is very important. The author found that as a non-specialist user the system was relatively easy to operate via the supplied software. However the process of strapping the tapes to hand and arm is greatly aided if a helper is present.

RECORDING MOTIONS

Through the supplied software, recording arm and hand movement can be done in number of file formats: 'Cartesian coordinates', 'C3D marker data' or 'Biovision Hierarchical Data' (BVH) skeletal data (Measurand 2007). Measurand recommends that to prevent the potential loss of data, recording should be done in the Measurand's own RAW file format and subsequently played back to be converted to other file format for export to the required application. However

this process of subsequent reformatting of file types was found to be time consuming and cumbersome, whereas recoding straight into the BVH file did not seem to pose any problems and no loss of data was ever experienced.

Starting and stopping the recording was found to present a significant issue. On the basic ShapeHandPlus system, starting and stopping the recording is done though a keyboard command on the host computer. In use this was found to cause some difficulties. This is especially the case if the system is to be operated by a single person, as it can be hard for the user to maintain concentration and 'flow' of a performance while having to return to the host computer's keyboard to initiate and terminate each recording. A foot-operated switch could help with this issue but this requires the user to coordinate with another limb.

'Excess motion' at the beginning and the end of the recording can also relatively easily be removed later in various programs, but it can be very hard to determine the intended 'start and stop' at the time of creation in a subsequent editing process. Perhaps the best solution to this problem is to develop a system which can be operated by voice commands.

As previously mentioned the ShapeHandPlus in its basic form records only the motion of the arm, hand and fingers from the shoulder down, and only in relation to the point of the shoulder. The system on its own does not have any means of registering its overall location in space. In practical use this means that any movement of the body, the torso or the shoulder in isolation or as part of a movement is not recorded. Therefore movements which to the user appear to be large and dramatic can in the recording be much more modest if the body and/or the shoulder has also been moved in space during the recording.

In practical terms this means that the system for this project's concept is best utilised with the user attempting to keep the shoulder and torso as static as possible, possibly aided by leaning or sitting against immovable object. However the issue can also be resolved by extending the system to include motion of the shoulder in relation to the rest of the body, or using the equipment as a part of an optical or magnetically based Mocap system which firmly establishes the overall spatial coordinates for the system.

ACCURACY

During initial observations the system appeared to have a reasonable performance in terms of accuracy. By using the system's real time feedback, the relayed motion

appeared to correspond adequately to the actual movement performed. For film and animation purposes this level of precision is probably perfectly usable, with the dramatic expressions of various gestures and movements easily recognisable.

However when attempting to use the system for this project's intended aim (as a conduit for recording hand movement to design physical shapes) - it becomes clear that the system's accuracy is less than satisfactory. Closer investigation of the graphical representations of recordings in the form of linear paths (in the IGES file format) revealed that the perceived shape described by the user bore little resemblance to recorded paths. The lack of accuracy in the system probably has several causes. The way that the system is fitted to the user by Velcro straps may contribute significantly to the problem, the fittings have to be loose enough to ensure the user the freedom to move, whilst firm enough for the equipment to stay in place. In practice this balance is very hard to achieve, and inevitably the equipment slides off its original position. This can be rectified by recalibrating, but it is not always clear to the user when, or if, this is necessary. The fibre optic tapes are not elastic which means that in order for the tapes to accommodate the various movements of the body, they have to compress by bending into loose 'loops', and this bending may not be consistent.

However the main cause of the problem probably lies in the nature of the system relying on the curvature of the fibre optics. The application of this technology with Mocap is still relatively new and one would expect the technology to improve over the coming years, although in terms of accuracy this method will probably never rival that of camera based Mocap systems (Measurand Inc. 2007)

In practical use the lack of accuracy is the main obstacle for a successful application of the ShapeHand equipment for this concept. The system does seem to register even very small movements but the exact distance, angle or trajectory appear to be much more arbitrary. This situation can be helped by compensating the movement using the live feedback on the host computer. This is one of the system's most valuable features, not only does this facilitate monitoring of the motion continuously during the recording, it also enables the user to check the calibration of the system at any given time. Furthermore it gives the user the opportunity to practice moves before committing to a recording.

Other ways of compensating for the equipment's lack of accuracy is to record motion at alternative angles.

Through trials it was established that recording movement of the hand, arm and fingers diagonally across the user's chest provided better results than motions moving from 'side to side' or straight back and forth. Despite all attempts of getting good data during the recordings it appeared to be impossible to achieve files which did not need subsequent editing to make them usable for the intended purpose. This editing process presents some real difficulties in relation to this research's stated aim of establishing methods of creating artifacts which aesthetically clearly reflect the evidence of the design process involving the human hand. Any editing must be kept to a minimum in order not to lose any of the 'dynamics' and small 'imperfections', which give a genuine evidence of the maker's hand.

APPLICATIONS FOR THE PROCESS - CERAMICS

The initial idea for an application for this concept was to use the process to create a series of ceramic shapes. The malleable nature of plastic clay and the predominant use of the hand as the creative tool in pottery, this application seems to have an obvious connection with the concept of this research project. The investigation started by recording a series of gestural movements describing imagined vessels or forms. As previously mentioned the files were recorded directly as BVH files in the ShapeRecorder software. In order to translate the movement into linear paths the files were imported into the Softimage XSI software where an animated skeletal representation of the motion allowed the trajectory of the hand and fingers to be converted into three dimensional lines in the form of IGES files.

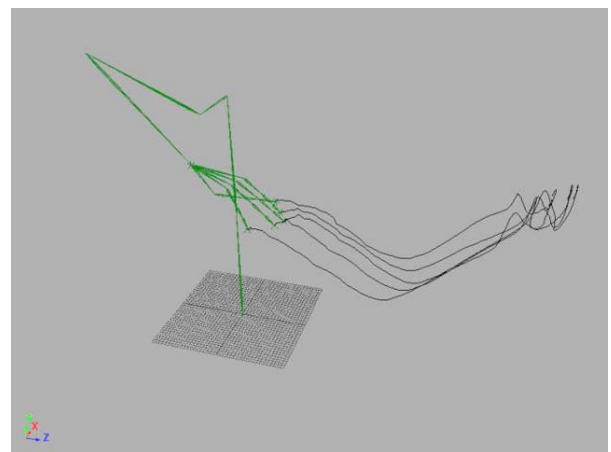


Figure 2. Animated skeletal representation of motion in Softimage XSI

These files were then imported into the Rhino 3D software to be used as construction splines for surfaces or 'solid' forms. The construction of these forms poses an interesting question; how to best represent the arbitrary space between the fingers, as this area is clearly not part of the recorded movement. The Rhino software

allows for an infinite variety of curvatures that will connect the splines into a surface, but these curvatures can have a dramatic effect on the aesthetics of the object. The most commonly used solution for this project was not to apply any curvature at all but leave the connecting space as straight sections, choosing this option meant that the paths are clearly visually represented.

Following the construction of surfaces or 3D solids in the Rhino program the files can be developed into physical shapes by a number of digital production methods such as Rapid Prototyping (RP) or Computer Numerically Controlled (CNC) milling.

For this project CNC milling was chosen as the preferred development method. The reason for opting for this technique was the possibility of working with larger shapes (the commonly available RP build envelope is still limited in size, usually around 300mm to 400mm cubed, and building larger objects via this method is prohibitively expensive). CNC milling also provides a superior surface quality to RP and gives the options of developing the shapes directly in a wide range of materials.

For this investigation a number of shapes were milled in blue foam using a Bridgeport VMC 1000 3 axis-milling machine (Hardinge 2007). The milled foam shapes were then sealed with varnish and plaster moulds suitable for slip casting were then developed from them, after which the ceramic pieces could finally be made and fired.



Figure 3. Ceramic (porcelain) form of a hand movement recorded via the ShapeHandPlus system.

Even though this investigation succeeded in establishing a complete creation method from Mocap shape recording to finished ceramic item it was found the ceramic medium may not be the most suitable material for this concept. The process of making suitable plaster moulds from the milled shapes is

complex and time consuming due to the inevitable irregular shape of the forms. Many of the forms are also poorly suited for the process of drying and firing, leading to high losses in the later stages of the production. Further research may establish more successful ways of applying this concept to the ceramic medium.

FURNITURE

Following the investigation with the ceramic medium a further investigation using the same concept applied to furniture design was undertaken.

In this case motions describing a series of seats were recorded. Using the previously described technique the files were converted, and surfaces were created using the Rhino software.

CNC milling was again employed as the preferred manufacturing method for the reasons previously mentioned but this time polyurethane model board, (M651-2) supplied by Alchemie (Alchemie 2007), was used as the medium. This material is durable enough to be used as the actual seating material, so using this medium meant that the seats could be manufactured directly via CNC milling without having to apply any subsequent moulding or manufacturing processes.

The recording used for the seats was a long relatively flat motion. Editing of the recording was kept to a minimum, limited mainly to that of scaling. The long proportion of the shape meant that shape could be made into three separate seat sections which placed together produced the whole continuous shape.



Figure 4. Seat design developed during the investigation of the ShapeHandPlus.

Throughout the seat there is clear visual evidence of individual movements of the fingers during the recording, with even the smallest trembling of the digits clearly reflected. The aesthetics could perhaps best be compared to that of a hand thrown pot with the hands and fingers of the makers clearly evident in throwing lines left on the finished piece. After milling the seats

were sealed and attached to metal legs, which were constructed by conventional manufacturing methods. Despite the distinctive aesthetics, the functional aspect of the seats is not compromised, they remain perfectly useable and comfortable.



Figure 5. Evidence of the maker: Detail of the seat created during the ShapeHand investigation and detail of hand thrown porcelain cups

Using the concept for this application proved very successful, mainly due to the direct manufacture of the seats, which stood in contrast to the complex mould making and subsequent lengthy production method of the ceramic pieces. Using the concept in collaboration with conventional manufacturing methods rather than describing the whole piece purely via Mocap, also showed good potential.

GRAPHIC DESIGN

While the two first investigations with the ShapeHand dealt with the use of the concept to design three-dimensional pieces, an alternative approach applying the equipment for creating two-dimensional graphic design was also undertaken. In this investigation a series of tea towel patterns were developed by recording the motion of drying up a teacup with a towel. These movements were converted from three-dimensional files into two-dimensional vector paths. The paths were then printed digitally on cotton and made into a series of tea towels. The concept here was to use the intended action of the object (the tea towel) directly as a graphical representation on the object itself. This use of the technology also showed potential and could be utilised in a wide range of related two-dimensional graphics applications.



Figure 6. Tea towels with patterns created via motion capture

INVESTIGATION WITH THE MICROSCRIBE® G2L

Along side the exploration with the ShapeHand equipment a related investigation was undertaken using a Microscribe® G2L digitising arm.



Figure 7. The Microscribe G2L

The intended application for the Microscribe is not designing or capturing motion but digitising, measuring and inspecting already existing objects (Immersion 2007), however a previous research project which produced a range of trophies for the United Kingdom Science Park Association (UKSPA), established that the Microscribe has a lot of potential as a three-dimensional drawing tool. In this project the scribe was used to record free flowing three-dimensional sketches by moving the arm of the Microscribe around in 'mid air'. The movements were recorded direct via the Form Z 3D modelling software and the shapes were produced via Fused Deposition Modelling (FDM) Rapid Prototyping (Jorgensen 2005).



Figure 8. Trophies for UK Science Park Association, created with the Microscribe

Although the Microscribe is not a specific design tool there are a number of related commercial products, which are. SensAble Technologies produces a range of haptic arms which have a similar principle to the Microscribe but are dedicated design tools. The ability of these arms as design tools in combination with the FreeForm® software are thoroughly described by Sener et al, (2003).

However the haptic element was not considered to be an important issue in this research, furthermore these haptic systems are generally considerably more expensive and only work with a limited number of dedicated software packages (SensAble 2007). The Microscribe works directly within a wide range of 3D modelling programs and has the added advantage of versatility, as it can be used for its intended purpose of digitising, as well as an intuitive design tool or even as a combination of the two.

Many of the shortcomings found in the ShapeHand equipment were complimented by the abilities of the Microscribe. One of the most crucial qualities of the scribe was the high level of accuracy. The Microscribe has the ability of capturing 3D data down to an accuracy of 0.4 mm (Immersion 2007). While working with the scribe the user can therefore be generally confident that the data captured during a designing session is of his/her movement.

The fact that the Microscribe also works directly within many of the most common design software such as Form Z and Rhino 3D can be a big advantage (Immersion 2007). Rhino was the software predominately used in this research project, the scribe connects directly into the program without the need for any additional software installation. Within Rhino there are a number of software tools specific to the Microscribe, however, the equipment can also operate as a general pointing device with almost all other tools in

the program - like a conventional computer mouse but far more accurate and with the added third dimension of the Z-axis.

Clearly when using the Microscribe the user's freedom of movement is slightly more restricted, compared with the ShapeHand system. The scribe's arm is not able to rotate 360° in all joints therefore certain moves may need to be practiced and pre-planned so the Microscribe's arm can be positioned to accommodate such shapes.

Although in practical use this is rare and does not pose big difficulties if this does happen. Completely free movement is also to a minor degree curtailed by the fact that user is grasping a stylus attached to a mechanical arm. Again in use this was found to be this is less of an issue as the arm is counterbalanced and has very smooth operations in all moving joints.

In terms of the equipment's use as a design tool, the most obvious difference between the two pieces of equipment is the single point data input you get from the Microscribe. This clearly excludes the opportunity of interacting dynamically with individual fingers, however a single point input can have an advantage in terms of aesthetic clarity as the following description will illustrate.

APPLICATION – GLASS

An early investigation with the ShapeHand system had explored the use of glass as a potential medium for the overall concept. The approach was to cast refractory plaster moulds from the milled shapes and kiln form glass over these to create the final artefacts (Cummings 1997). The results of this approach was generally unsatisfactory, as the fine detailing illustrating the linear paths from the Mocap recording was not transferred clearly to the final glass shapes. The molten glass would 'rest' and thereby reflect the surfaces connecting the splines, rather the linear paths themselves. The resulting glass forms would then illustrate more of the 'artificial' surfaces created in Rhino than the actual recorded motion which is spline data.

However, the investigation did reveal how the fluid nature of the glass could have some potential as a medium to create artefacts, the challenge remained to establish a technique where the recorded spline data was clearly represented in the final pieces and any visual evidence of artificial created surfaces was kept to a minimum or eliminated entirely.

The investigation with the Microscribe aimed to utilise the finding from the Shapehand investigation with the glass medium. The Microscribe's 'single point'

recording input was a contribution factor in establishing a feasible technique utilizing the material properties of the molten glass as a medium for this concept.

Just like the ShapeHand process the method developed starts with the recording of gestural hand movements. This was done by holding the tip of Microscribe and describing series of splines or loops whilst the motion was being recorded using the Rhino software. The splines were described in ‘mid air’ without the guidance of any stationary object to achieve a genuine expression of the movement of the human hand. The only active editing was the software’s ability to automatically close the lines into complete loops. The intention during the recording was to describe the rim of a bowl or vessel. After recording the splines were extruded in the Z-axis to produce developable surfaces (Schodek et al 2005), which were then achieved using Rhino’s ‘unroll surface’ command. This resulted in a two-dimensional surface with an edge containing the variable Z-axis coordinates.

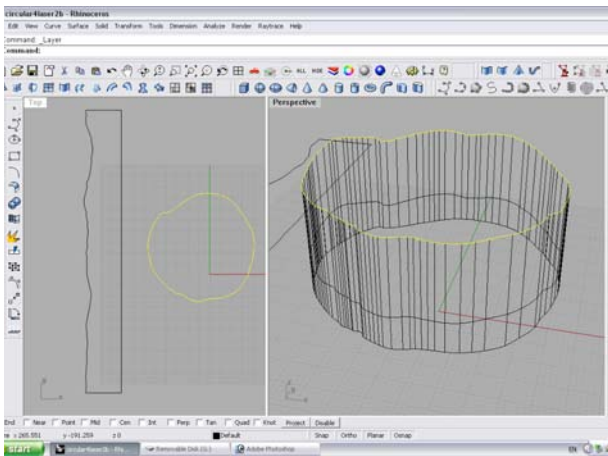


Figure 9. Three-dimensional linear path converted into 2 two-dimensional representations using ‘extruding’ and ‘surface un-roll’ command.

While combining these coordinates with the X, Y dimensions (the top view) of the splines, the three-dimensional splines could be represented by two two-dimensional projections.

This meant that physical 3D models of the splines could be developed very easily by combining these two projections using a bendable sheet material.

This was done by using 0.5 mm stainless steel sheet, from which the developed surfaces with the edge containing the Z coordinate were cut using a CNC laser. As the top projection (X, Y axis) did not need to be bendable, it was advantageous to use a more stiff material of 6mm MDF (medium density fibreboard), which was also cut to shape using a CNC laser cutter. By squeezing the stainless steel sheet into the laser cut

loop in the MDF board (which acted as a collar), accurate physical models of the three-dimensional splines were achieved.



Figure 10. The process of developing the glass shapes.

The intention was to use these models as kiln moulds to shape glass vessels from flat sheets of glass. In order to do this the stainless sheet ring had to be further supported by casting refractory plaster around it, which meant that the flammable MDF collar could be removed before moulds were placed in the kiln. Circular disks of 6mm flat glass were then used to create shapes in a kiln forming process known as ‘free fall slumping’ (Cummings 1997). In this process the glass will soften and gravity will make the glass take the shape of the stainless steel ring’s edge. In the centre where the glass is unsupported, heat and gravity will make the glass bend to a fluid dome which forms the ‘body’ of the bowl.



Figure 11. Glass bowl (un-trimmed edge) result from the Microscribe investigation with the recorded line/edge clearly visible.

After cooling the excess glass which overhangs the edge can be trimmed to the line created by the stainless steel ring, or alternatively left on for aesthetic effect.

The method of manufacturing the stainless steel moulds, which was developed specifically for this project,

showed significant potential for future use. This technique results in an edge in the glass vessels that forms the main focal point of the object and provides a physical manifestation of the original captured gesture. This is especially the case where the overhanging surplus glass is trimmed away, leaving the optical qualities of the glass to create a dark edge of the bowl illustrating precisely the recorded line from the Microscribe. The dome of the bowls is a natural result of the making process, as opposed to an arbitrary surface created via software, (as was the case with the furniture application in the ShapeHand investigation where straight sections had to be created via the Rhino software to connect the recorded splines into surfaces that could be developed via CNC milling). The bowl dome form results from integrating a series of production methods, rather than being a single predetermined CAD designed component. This 'evolution' of form through integrated processes results in variations that are desirable in the context of individual craft production.

A variation of the process using a line of stainless steel rods to represent the recorded 'movement spline' instead of the stainless steel ring, was also developed as a part of this project. This principle comes close to the concept of reconfigurable tooling as describe by Halford (2005), but with a very different application.

DISCUSSION

There are indications that the area of human computer interface is likely to develop considerably over the coming years. It is interesting to see how long the Window/Icon/Mouse/Pointer (WIMP) interface have managed to dominate the way most creative practitioners interact with digital toolset. While a lot of alternative interfaces have been theorised about (Buxton, 2007), or used in very specialised fields, there are signs of an emerging general change. An example of this is Apple Inc.'s (2007) iPhone. The phone features one of the first gesture recognition interfaces on a mass consumer product. While most of the iPhone is controlled the same way touch screen computer kiosks have been operated for years, a number of commands on the new device can be controlled by gestures of more than just one finger. The iPhone's patented 'Multitouch' can involve two or more fingers. An example is the iPhone's image organisation and manipulation section where scaling and zooming are controlled by pinching or spreading with two fingers (Apple 2007). A more far-reaching application of this concept was demonstrated by Jeff Han at the

'Technology, Entertainment and Design' (TED 2007) conference at Monterey, California last year. Here Han demonstrated a system which could be manipulated with combination of all ten digits. Han illustrated through a number of different applications how the interface of the creative IT based toolset of the future may not have much of an interface at all, rather than a completely intuitive gestural interaction.

While both of these examples are based on a purely two-dimensional gestural interaction with a flat screen, it will now be very interesting to see if these concepts can be implemented with three-dimensions.

It is interesting to see how industries with equally high dependence on three-dimensional digital toolset, which is the case with design/engineering and animation, it is still a cumbersome task transferring files from one field to another. At the start of the research project involving the ShapeHand system, the files had to be converted though 5 different formats in order to be realised via CNC milling (the process was later shortened to 3 conversions). There should be no reason why the motion capturing software should not be able to record directly in a file format that could be processed directly in CAM. Many of the current crop of designers may still feel more comfortable with the keyboard and mouse input they are use to. This could mean that there maybe little commercial motivation for combining the Mocap technology with established digital design and manufacturing processes.

One issue is the increasing ability of the data input technologies, another matter is the creative use of these. The full potential of the ever improving digital tools may only be reached by researching which mediums are most suitable to use and investigate the wider development processes which these tools can play a part in. This is illustrated well with the Microscribe investigation, which was based on using the material properties of molten glass. It is likely that usefulness of this concepts is limited to specific materials and processes, rather than as a generic design tool.

In terms of using Mocap for this application it is surprising to see how little research seem to have been conducted in this area. Despite the use of such systems have been common in the animation and film sector for a number year, searches show very little evidence of other projects researching the use of the technology for this application. Apart from this programme the only other project which could be found to have a similar focus is the Swedish design group 'Front Design's project from 2006 (Front Design 2007).

To reach the full potential of using Mocap as a part of design process the performance, usability and price of the current available equipment would probably need to improve somewhat. But while the recording technology develops it would be very beneficial to continue to research the possible creative applications of this technology. Motion capture will clearly not be suitable for all creative practices, but it could have a lot of potential in a wide range of applications, were it could play a very interesting role in developing a more intuitive design interfaces as well as providing the possibility of leaving an aesthetic imprint of the future creative practitioner's hand.



Figure 12. Glass bowls with trimmed edges, results from the Microscribe investigation.

REFERENCES

1. Apple Inc. (2007) <http://www.apple.com>
2. Alchemie (2007) http://www.alchemie.com/model_board.htm
3. Arthur, C. 2007, 'The hands-on revolution' The Guardian 18/1/2007, IT section, pp 1
4. Buxton, Bill (2007), <http://www.billbuxton.com/multitouchOverview.html>
5. Cummings, K 1997, 'Techniques of Kiln Formed Glass' London, A&C Black
6. Dyer, S., Martin J., Zulauf J. 1995, 'Motion Capture White Paper' <http://reality.sgi.com/employees/jamsb/mocap/MoCaP20.html>
7. Front Design (2006) <http://www.frontdesign.se/sketchfurniture/>
8. Furness, M. 2004, 'Motion Capture', MIT Communication Forum <http://web.mit.edu/comm-forum/papers/furniss.html>
9. Greenhalgh, P. The Persistence of Craft, A & C Black 2002
10. Halford, B. 2005, 'Reconfigurable Tooling', Time Compression Technologies, vol 13 issue 6, 2005 pp 40-43
11. Hardinge Inc. (2007), <http://www.bpt.com/>
12. Immersion Inc. (2007) <http://www.immersion.com/digitizer/>
13. Jorgensen, T. 2005, 'Binary Tools', *Proceedings form 'In the Making' - Nordic design Reaserch conference* Copenhagen, Royal Academy of Fine Arts, School of Architecture. <http://www.tii.se/reform/inthemaking/files/p14.pdf>
14. Liverman, M. 2004, 'The Animator's motion capture guide' Massachusetts, Charles River Media
15. McCullough, M. 1996, 'Abstracting Craft', Massachusetts, MIT press.
16. Measurand Inc. (2007) <http://www.measurand.com/>
17. Metamotion (2007) <http://www.metamotion.com>
18. Rhinoceros® (2007) <http://www.rhino3d.com/>
19. Schodek, D., Bechthold, M., Griggs, K., Kao, K. M., Steinberg, M. 2005, 'Digital Design and Manufacturing', Hoboken, New Jersey, John Wiley and Sons.
20. Sener, B., Pedgley O., Wormald, P., Campbell, I. 2003, 'Incorporating the Freeform Haptic Modelling system into New Product Development' *Proceedings form the EuroHaptics-2003*, Dublin, Trinity College. <http://www.eurohaptics.vision.ee.ethz.ch/2003/40.pdf>
21. SensAble Technologies Inc. (2007) <http://www.sensable.com/>
22. TED (Technology, Entertainment, Design) (2007), <http://www.ted.com/>